



US008071492B2

(12) **United States Patent**
Hess et al.

(10) **Patent No.:** **US 8,071,492 B2**
(45) **Date of Patent:** ***Dec. 6, 2011**

(54) **TEXTILE FABRIC FOR THE OUTER SHELL OF A FIREFIGHTER'S GARMENT**

(75) Inventors: **Diane B. Hess**, Gastonia, NC (US);
Charles A. Thomas, Pearesbury, VA (US);
Clifton A. Perry, Charlotte, NC (US);
Richard O. Tucker, Oakboro, NC (US)

(73) Assignee: **PBI Performance Products, Inc.**,
Charlotte, NC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1690 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **10/348,101**

(22) Filed: **Jan. 21, 2003**

(65) **Prior Publication Data**

US 2003/0203690 A1 Oct. 30, 2003

Related U.S. Application Data

(63) Continuation-in-part of application No. 09/933,301, filed on Aug. 20, 2001, now Pat. No. 6,624,096.

(51) **Int. Cl.**
D03D 15/12 (2006.01)
D03D 15/00 (2006.01)
D03D 13/00 (2006.01)
D02G 3/04 (2006.01)

(52) **U.S. Cl.** **442/302**; 442/181; 442/203; 442/217;
428/920; 428/921; 57/252

(58) **Field of Classification Search** 428/920,
428/921, 364, 365, 373, 377; 442/301, 181,
442/189, 203, 208, 217, 197, 199, 302; 57/238,
57/244, 252
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,619,705 A 12/1952 Boutwell
3,347,969 A 10/1967 Moelter
3,511,747 A 5/1970 Davies
3,949,111 A 4/1976 Pelletier
4,048,139 A 9/1977 Calundann et al.
4,198,494 A * 4/1980 Burckel 525/432
4,219,996 A 9/1980 Edgawa et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2313995 A1 7/2000

(Continued)

OTHER PUBLICATIONS

Definition of "Polybenzimidazole Fiber (PBI)," Dictionary of Fiber & Textile Technology, Published by Hoechst Celanese, 1990, pp. 116-116.

(Continued)

Primary Examiner — Angela Ortiz


Assistant Examiner — Jennifer Steele

(74) *Attorney, Agent, or Firm* — Hammer & Associates, P.C.

(57) **ABSTRACT**

The present invention is directed to a textile fabric. This fabric is particularly well suited for use as the outer shell fabric of a firefighter's garment. The fabric is a woven or knitted fabric of spun yarns and multi-filament yarns. The spun yarn includes a first staple being a polymer selected from the group consisting of aramid, PBI or PBO or melamine formaldehyde, and a second staple being an aramid polymer. The multi-filament yarn includes an aramid filament.

4 Claims, 1 Drawing Sheet

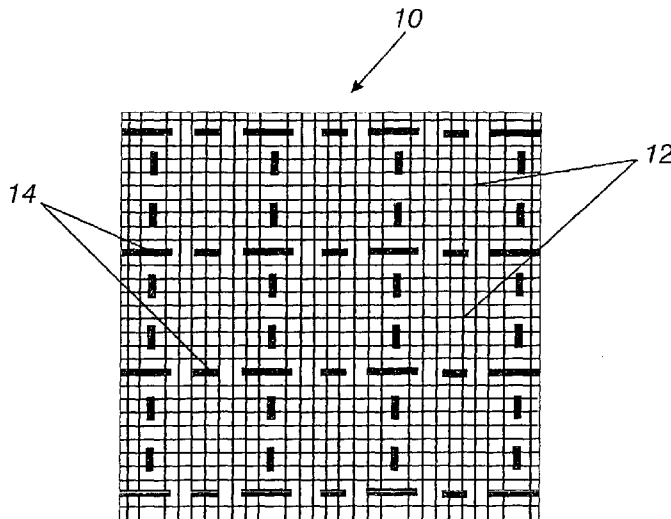

U.S. PATENT DOCUMENTS

4,469,744	A	9/1984	Grot et al.	
4,470,251	A	9/1984	Bettcher	
4,500,593	A	2/1985	Weber	
4,602,385	A	7/1986	Warren	
4,748,065	A	5/1988	Tanikella	
4,750,443	A	6/1988	Blaustein et al.	
4,865,906	A	9/1989	Smith, Jr.	
4,900,613	A	2/1990	Green	
4,923,741	A	5/1990	Kosmo et al.	
4,931,345	A	6/1990	Böttger et al.	
4,941,884	A	7/1990	Green	
4,958,485	A	9/1990	Montgomery et al.	
4,967,548	A	11/1990	Fangeat et al.	
4,996,099	A	2/1991	Cooke et al.	
5,095,549	A	3/1992	Aldridge	
5,119,512	A	6/1992	Dunbar et al.	
5,120,599	A	6/1992	Lewis	
5,136,723	A	8/1992	Aldridge et al.	
5,177,948	A	1/1993	Kolmes et al.	
5,202,086	A	4/1993	Baliga et al.	
5,215,795	A	6/1993	Matsumoto et al.	
5,233,821	A	8/1993	Weber et al.	57/224
5,299,602	A	4/1994	Barbeau et al.	139/420 A
5,323,815	A	6/1994	Barbeau et al.	
5,344,698	A	9/1994	Rock et al.	
5,447,787	A	9/1995	Shaffer	
5,482,763	A	1/1996	Shaffer	442/214
5,499,663	A	3/1996	Barbeau et al.	
5,538,781	A	7/1996	Rao et al.	
5,560,990	A	10/1996	Ilg et al.	
5,624,738	A	4/1997	Barbeau et al.	
5,628,065	A	5/1997	Austin	
5,637,114	A	6/1997	Höhnke	
5,654,067	A	8/1997	Dinger et al.	
5,688,594	A	11/1997	Lichscheidt et al.	
5,691,040	A	11/1997	Barbeau et al.	
5,701,606	A	12/1997	Aldridge	
5,858,888	A	1/1999	Underwood et al.	
5,882,791	A	3/1999	van der Werff et al.	
5,926,842	A	7/1999	Price et al.	
5,928,971	A	7/1999	Ellis et al.	442/76
5,962,627	A	10/1999	van der Werff et al.	
5,983,409	A	11/1999	Aldridge et al.	
5,996,122	A	12/1999	Aldridge et al.	
6,038,700	A	3/2000	Aldridge et al.	
6,065,153	A	5/2000	Underwood et al.	
6,192,520	B1	2/2001	Underwood et al.	2/93
6,211,099	B1	4/2001	Hutto, Jr. et al.	
6,247,179	B1	6/2001	Underwood et al.	
6,559,079	B1	5/2003	Bachner, Jr.	
6,562,741	B1	5/2003	Lilani	442/301
6,624,096	B2	9/2003	Thomas et al.	442/181
6,699,802	B1	3/2004	Hainsworth et al.	
6,840,288	B2	1/2005	Zhu et al.	
6,974,785	B1	12/2005	Barbeau et al.	
2001/0009832	A1	7/2001	Shaffer et al.	
2002/0034905	A1	3/2002	Truesdale	
2002/0124544	A1	9/2002	Land et al.	57/5

FOREIGN PATENT DOCUMENTS

CH	681600	A5	4/1993
DE	4229546	A1	3/1994

EP	0599587	A1	6/1994
FR	2649128		1/1991
GB	2070077	A	9/1981
JP	1272836		10/1989
JP	2191760		7/1990
JP	2264030		10/1990
JP	4024240		1/1992
JP	5125637		5/1993
JP	6220730		8/1994
JP	6226900		8/1994
JP	7048754		2/1995
JP	7292534		11/1995
JP	8109530		4/1996
JP	8246287		9/1996
JP	9226031		9/1996
JP	9078379		3/1997
JP	9119038		5/1997
JP	10130990		5/1998
JP	11279894		10/1999
JP	2000008247		1/2000
JP	2000045147		2/2000
JP	2000234236		8/2000
JP	2000256927		9/2000
JP	2000273742		10/2000
JP	2000303285		10/2000
JP	2000303289		10/2000
RU	2127536	C1	3/1999
WO	WO 00/66823		11/2000
WO	WO 00/75410	A1	12/2000

OTHER PUBLICATIONS

Definition of "Polybenzimidazole Fiber (PBI)", *Dictionary of Fiber & Textile Technology*, Published by Hoechst Celanese, 1990, pp. 115-116.

"abrade; abrasion," The Random House College Dictionary Revised Edition, The Random House, Inc. (New York), (p. 4,5), (1980).

"Abrasion Resistance," *Dictionary of Fiber & Textile Technology*, KoSa (Charlotte, NC), (p. 1), (1999).

"tear," The Random House College Dictionary Revised Edition, Random House, Inc. (New York), (p. 1348), (1980).

"Tear Strength," *Dictionary of Fiber & Textile Technology*, KoSa (Charlotte, NC), (p. 193), (1999).

Ernest R. Kaswell, "Cover, Copyright pages," *Wellington Sears Handbook of Industrial Textiles*, Wellington Sears Company, Inc. (New York, NY), p. 154-159, (1963).

Dictionary of Fiber & Textile Technology, Kosa, Charlotte, NC (1999) pp. 42, 44, 184.

NFPA 1971 (2007 Edition), NFPA, 1 Battery Park, Quincy, MA, pp. 1971-33 & 1971-56.

ASTM D1424-96—Standard Test Method for Tearing Strength of Fabrics by Falling Pendulum Type (Elmendorf) Apparatus, ASTM, 100 Bar Harbor Drive, West Conshohocken, PA, 1996.

ASTM D5587-05—Standard Test Method for Tearing Strength of Fabrics by Trapezoid Procedure, ASTM, 100 Barr Harbor Drive, West Conshohocken, PA, 2005.

Re-exam Serial No. 90/008132, Amendment filed May 9, 2007.

* cited by examiner

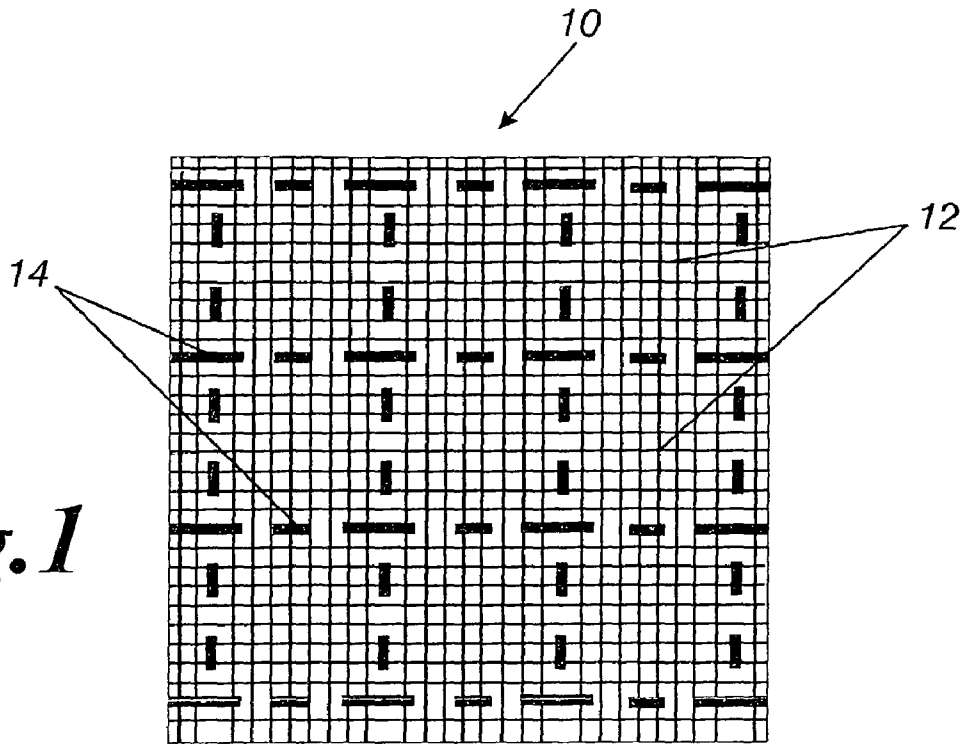


Fig. 1

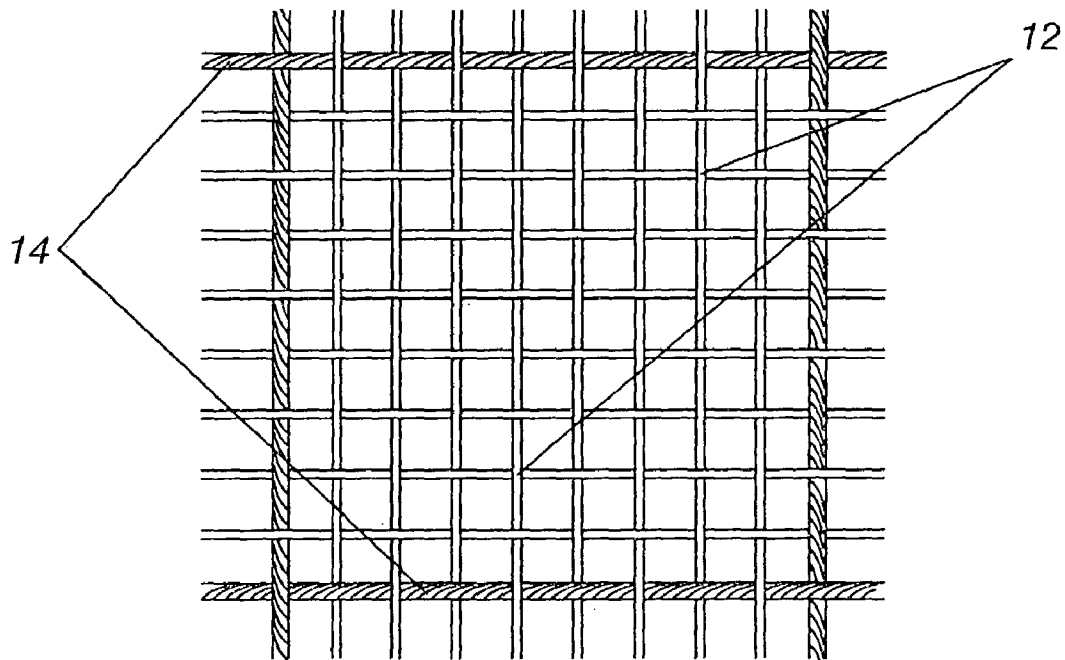


Fig. 2

1

TEXTILE FABRIC FOR THE OUTER SHELL OF A FIREFIGHTER'S GARMENT

RELATED APPLICATION

The instant application is a continuation-in-part of U.S. patent application Ser. No. 09/933,301 filed Aug. 20, 2001 now U.S. Pat. No. 6,624,096.

FIELD OF THE INVENTION

The present invention is directed to a textile fabric for use as the outer shell fabric of a firefighter's garment.

BACKGROUND OF THE INVENTION

The outer shell fabric of a firefighter's garment must be flame, heat, abrasion, tear, and moisture resistant, durable, and lightweight. This outer shell fabric provides the first layer of protection for the firefighter.

U.S. Pat. Nos. 5,095,549; 5,136,723; 5,701,606; 5,983,409; 5,996,122; and 6,038,700 disclose, among other things, firefighter's garments having an outer shell fabric made of PBI/aramid fibers.

U.S. Pat. No. 5,299,602 discloses a woven, outer shell fabric made for firefighter's garments where the warp yarns are multi-filament aramid yarns and the weft yarns are either multi-filament or spun aramid yarns.

U.S. Pat. No. 5,628,065 discloses a firefighter's hood of a knit fabric formed of a blend of PBI and aramid fibers.

U.S. Pat. Nos. 6,065,153 and 6,192,520 disclose a woven outer shell fabric for a firefighter's garments. This fabric has a plain, twill or rip stop weave and the yarns are a mixture of PBI and aramid fibers. The fabric has a weight ranging from 5.5 to 8 OSY, preferably, 7.5 OSY.

One popular outer shell fabric is a woven fabric of spun yarns consisting of PBI and aramid staple. This fabric is known in the market as 'PBI GOLD®.' In the U.S., this fabric generally is made in the following forms: 1) a 7.5 OSY rip stop weave made from a 16/2 c.c. spun yarns consisting of 40% by weight PBI and 60% by weight of a para-aramid; or 2) a nominal 7.0 OSY (actual 7.3 to 7.4 OSY) rip stop weave made from a 21/2 c.c. spun yarns consisting of 40% PBI and 60% of the para-aramid. Internationally, this fabric is in the form of a 6.0 to 6.5 OSY rip stop weave 24-25/2 c.c. spun yarns of 40% PBI and 60% para-aramid, or a twill weave made from 35/2 c.c. spun yarns of 40% PBI and 60% para-aramid.

Another fabric used as an outer shell fabric is marketed under the trade name 'Millenia' from Southern Mills, Inc. of Union City, Ga. The Millenia fabric is made with a spun yarn consisting of 40% PBO and 60% para-aramid staple.

While 'PBI GOLD®' has proven to be an excellent outer shell fabric, there is still a need to improve these fabrics. There is a desire to have lighter weight fabrics that have better tear and abrasion resistance.

SUMMARY OF THE INVENTION

The present invention is directed to a textile fabric. This fabric is preferably used as the outer shell fabric of a firefighter's garment. The fabric is a woven or knitted fabric of spun yarns and multi-filament yarns. The spun yarn includes a first staple being a polymer selected from the group consisting of aramid or PBI or PBO or melamine formaldehyde, and a second staple being an aramid polymer. The multi-filament yarn includes an aramid filament.

DESCRIPTION OF THE DRAWINGS

For the purpose of illustrating the invention, there is shown in the drawings a form of the invention; it being understood,

2

however, that this invention is not limited to the precise arrangements and instrumentality shown.

FIG. 1 is a plan view of the textile fabric made according to the present invention.

FIG. 2 is a magnified plan view of the textile fabric made according to the present invention.

DESCRIPTION OF THE INVENTION

Referring to the drawings wherein like numerals indicate like elements there is shown in FIG. 1 an illustration of the textile fabric **10** made according to the present invention. Preferably, the fabric **10** has a gold color with a 'checkered' pattern created by black multi-filament yarns **14**. The fabric **10** may be woven or knitted. The fabric **10** is preferably woven with spun yarns **12** and multi-filament yarns **14**. The weaves are selected from the group consisting of plain, twill, rip stop, and oxford. The fabric weight may range from 6 to 8 OSY, preferably, 7 OSY. The weight ratio of spun yarns to multi-filament yarns should range from 85:15 to 92:8, preferably, 90:10. The multi-filament yarn may be inserted among the spun yarns, in both the warp and weft, at an insertion ratio of 1:5 to 1:20, preferably, 1:9. Preferably, the fabric is treated with a water/moisture resistant finish, as is well known.

The spun yarns **12** are a blend of a first staple and a second staple. The first staple is fiber made from a polymer selected from the group of aramid, PBI, PBO, melamine formaldehyde, or combinations thereof. The second staple is a fiber made from an aramid or blends of aramids. Exemplary spun yarns include, but are not limited to, blends of aramid staple, PBI and aramid staple, PBO and aramid staple, melamine formaldehyde and aramid staple, and PBI, PBO, melamine formaldehyde and aramid staple. The spun yarns may have any weight ratio of first and second staples. The weight ratio of first and second staple is preferably 20-60% by weight first staple and 40-80% by weight second staple. The spun yarns most preferably comprise 30-45% by weight of the first staple and 55-70% by weight of the aramid staple. The spun yarns may range in size from 32/2 to 16/2 c.c., preferably, 24/2 c.c.

PBI staple fibers are commercially available from Celanese Acetate LLC of Charlotte, N.C. PBO staple fibers are commercially available under the trade name of ZYLON® from Toyobo Co., Ltd. of Osaka, Japan. Melamine formaldehyde fibers are commercially available under the trade name of BASOFIL® from BASF Corporation of Mount Olive, N.J.

The aramid staple fibers may be either a meta-aramid or a para-aramid. Such aramid fibers are commercially available under the trade name of TWARON®, CONEX®, and TECHNORA® from Teijin Co. of Osaka, Japan; or NOMEX® or KELVAR® from DuPont of Wilmington, Del.; or P84 from Lenzing AG of Lenzing, Austria; or KERMEL® from Rhodia Inc. of Cranbury, N.J. When the aramid staple fiber forms the second staple mentioned above, it may be either meta-aramid or para-aramid. When the aramid staple fiber forms the second staple mentioned above, it is preferably the para-aramid.

The multi-filament yarn is made from aramid filament. Aramid may be either meta-aramid or para-aramid, the para-aramid is preferred. Such aramid fibers are commercially available under the trade name of TECHNORA®, TWARON®, and CONEX® from Teijin Co. of Osaka, Japan, or NOMEX® or KELVAR® from DuPont of Wilmington, Del., or P84 from Lenzing AG of Lenzing, Austria or KERMEL® from Rhodia Inc. of Cranbury, N.J. The multi-filament yarn ranges in size from 200 to 1500 denier, preferably, 400 denier. The multi-filament yarn may be a flat yarn, a twisted yarn, or a stretch broken yarn.

The instant invention has superior tear and abrasion resistance, at a lower weight, over the PBI GOLD® fabric. The results are set forth in Table 1.

Fabric A is 6.0 OSY fabric; spun yarn is 27/2 c.c. with 45 percent weight PBI and 55 percent Technora® staple; multi-filament is a flat yarn inserted every 10th yarn in the warp and weft.

Fabric B is 6.9 OSY fabric; spun yarn is 24/2 c.c. with 45 percent weight PBI and 55 percent Twaron® microdenier staple; multi-filament is a twisted yarn inserted every 9th yarn in the warp and weft.

TABLE 1

Performance Characteristic	Test Method	PBI Gold	Invention A	Invention B
Weight (OSY)		7.5	6.0	6.8-7.0
Trap Tear (lbs.)	ASTM D5733 (Trapezoida 1 Method)	40 × 35	75 × 75	63 × 63
Tabor abrasion	ASTM D-3884 (500 g wt. With H18 abrasion wheel)	225	180	293
Thermal Protective Performance, TPP (Composite)	NFPA 1971 (2000 Edition Section 6.10)	40	40	40
Trap Tear after UV	AATCC 16 E (Standard Method for Xenon arc exposure at 1.1 rad)			
60 hr		28.4 × 18.7	44.6 × 38.5	
180 hr		17.8 × 12.3	25.7 × 18.9	
300 hr		15.2 × 10.6	21.2 × 16.1	
Trap Tear after Sunlight	ASTM D5733 (Trapezoid Method)			
1 week		30.8 × 20.8	64.9 × 62.7	
2 week		24.3 × 17.0	45.5 × 40.1	
3 week		20.0 × 14.6	39.0 × 34.2	
4 week		18.8 × 13.1	34.0 × 33.9	
5 week		16.6 × 13.5	29.7 × 30.1	
6 week		14.8 × 10.5	26.6 × 23.6	

The present invention made be embodied in other forms without departing from the spirit and the central attributes thereof and, accordingly, reference should be made to the appended claims, rather than to the foregoing specification, as indicated the scope of the invention.

The invention claimed is:

1. An outer shell fabric for firefighter's turnout gear comprising:

a woven fabric including spun yarns and filament yarns, said spun yarn consisting of 30-45 weight % of a first staple of a polymer selected from the group consisting of PBI or PBO, and a second staple of an aramid polymer, and a weight ratio of said spun yarn to said filament yarn

30

in the range of 85:15 to 92:8, said woven fabric having a greater trap tear when compared to a fabric of equivalent weight without said filament and a greater tabor abrasion when compared to the fabric of equivalent weight without said filament.

2. The fabric of claim 1 wherein the weight ratio is 90:10.

3. The fabric of claim 1 wherein the woven fabric has a weave selected from the group consisting plain, twill, rip stop, or oxford.

4. The fabric of claim 1 wherein the filament yarn being inserted among the spun yarn at a ratio of 1:5 to 1:20.

35

40

* * * * *